



TEL: +1 724-479-5100

FAX: +1 724-479-5105


[www.nonlethaltechnologies.com](http://www.nonlethaltechnologies.com)

[sales@nonlethaltechnologies.com](mailto:sales@nonlethaltechnologies.com)

## MP-2BSD-CS - BAFFLED SMOKE GRENADE SIDE DISCHARGE - CS SMOKE

### DESCRIPTION

The MP-2BSD-CS Baffled Smoke Grenades delivers a cloud of irritant agent with a discharge time approximately 30 seconds. The grenades construction is designed to reduce fire risk with a baffled inner chamber. The grenades outer body is US Mil-Spec Tern Steel and is the same body used in the US M18 series color smoke grenades. Smoke is discharged through 9 - 4mm ports in the sides of the grenade body. The side emission ports are to reduce the throwback potential of the grenade.

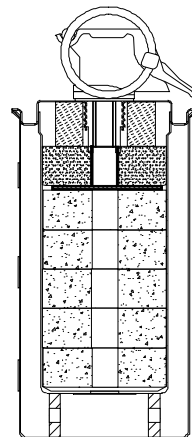

### SPECIFICATIONS

Type	Hand Grenade, Continuous Discharge Smoke
Discharge	CS Irritant Smoke
Body Material	Outer Tern Steel/ US Mil-Spec, Inner Body: Aluminum
Emission Ports	9 (3 vertical rows of 3 ports)
Diameter	60 mm Body
Fuze Type	M201A1
Fuze Delay	2.0 Seconds
Length Overall	141 mm
Overall Weight	370 grams
Chemical Weight	150 grams
Net Irritant Agent	40 grams
Discharge Time	30 ± 10 Seconds

### SHIPPING INFORMATION

UN Number	UN 0303
Shipping Name	Ammunition, Smoke
Hazard Class	1.4G (8)
Quantity Per Package	25 Grenades
Packaging	Fiberboard Box, 4G UN/DoT Approved

### WARNING

Pyrotechnic devices may cause fires.  
Product should only be used outdoors

